

### SÉRIE PRO - ROULEAU

Fiche technique de la gamme complète  
Revêtement de sol en caoutchouc de qualité

### PRO SERIES - ROLL

Technical specifications for the complete lineup  
High quality rubber flooring

PRODUCT PERFORMANCE		PRO	PRO PLUS
		1/8" (3mm) à/to 3/8" (10mm)	1/2" (12mm)
Force Reduction	ASTM F2569	12.9% – 13.7%	19.70%
Energy Restitution	ASTM F2772	85% – 86%	80.20%
Abrasion Resistance	ASTM D3389	< 1.7g, 1000 cycles	< 1.7g, 1000 cycles
Static Load Limit	ASTM F970	0.001" @ 250 PSI	0.001" @ 250 PSI
Coefficient of Friction	ASTM D2047	Wet 1.20 / Dry 1.20	Wet 1.20 / Dry 1.20
Slip Resistance	ASTM F2772	Pass	Pass
Pill Test	ASTM D2859	Pass	Pass
Density	ASTM D3676	> 65 lb/ft <sup>3</sup>	> 65 lb/ft <sup>3</sup>
Hardness	ASTM D2240 (Shore A)	70 +/- 5	70 +/- 5
Tear Strength	ASTM D624	5.71 lb/in	5.71 lb/in
Elongation	ASTM D412	> 90%	> 90%
Tensile Strength	ASTM D412	> 300 PSI	> 300 PSI
Flexibility	ASTM F137 1/4" Mandrel	Pass	Pass
Resistance to Chemicals	ASTM F925	No Change	No Change
VOC Compliant	ASTM D5116/CA 1350	Yes	Yes
LEED Qualification	Qualifies for Material and Resources Credit, and Indoor Environmental Quality (EQ) Credit*		
Rolling Load	EN1569	Pass	Pass
Resistance to Impact	EN1517	14 N/m	14 N/m
Resistance to Indentation	EN1516	0.1mm	0.1mm
Vertical Deformation	ASTM F2157	1.4mm	1.4mm
Environmental Product Declaration	ISO 14025	-101047-4150	-101047-4150
Acoustical Data *	ASTM E90	STC 54	-
	ASTM E492	IIC 53	-
	ASTM E2179	ΔIIC 24	-

\* tested on a 6" concrete slab with no ceiling


### COLORS

	PRO	PRO PLUS
	1/8" (3mm) à/to 3/8" (9mm)	1/2" (12mm)

#### Couleurs standard



#### Sur Commande Spéciale Qte minimales s'appliquent

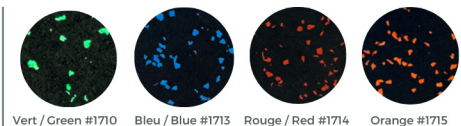

**COMMUNIQUEZ AVEC NOUS  
POUR PLUS D'INFORMATION**  
Contact us for more information

☎ 418 957-7552  
✉ info@mgrcanada.com

📍 782 Route-du-Président-Kennedy  
Beauceville (Québec) G5X 1B9

🌐 mgrcanada.com