

PRO SERIES (TILE) SPECIFICATIONS

Shore Hardness	D2240	>70 (+/- 5)
Compression Set	D395	-15 TO -45% @ 25%
Taber Abrasion	C501	0.45
Tensile Strength	D412	>300 PSI
Elongation at Break	D412	>90%
Coefficient of Friction	D1894-95	WET 1.20/DRY 1.20
Density	D729	>65 LBS/FT ³
Critical Radiant Flux	D395	CLASS I/II*
Flame Spread	E84	135**
Smoke Density	E84	<450**
Tear	D624	5.71 LBF/IN
Chemical Resistance	F925-02	NO CHANGE

* CLASS | AVAILABLE UPON REQUEST.


** SAME AS CARPET AND WOOD.

STANDARD TILE SPECIFICATIONS


WIDTH
24" (610mm)

LENGTH
24" (610mm)


THICKNESS
1/4" (6mm)

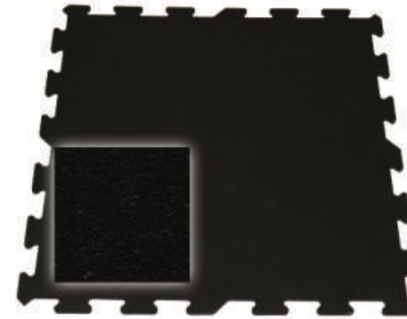


1701 BLACK

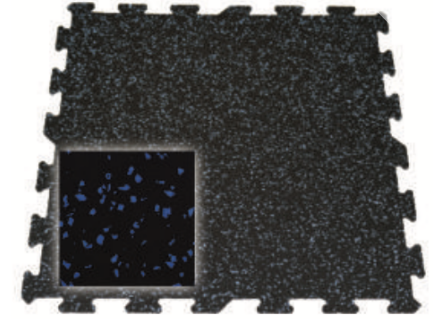


1702 BLUE

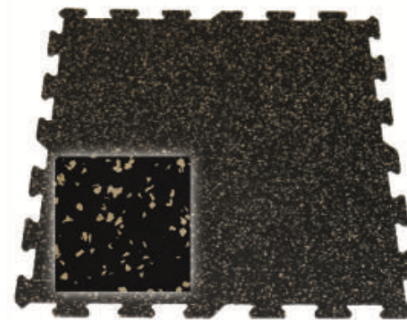

1703 BEIGE

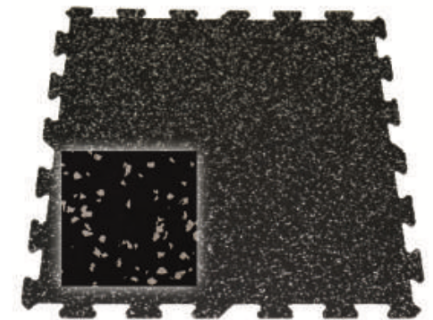

1704 SILVER

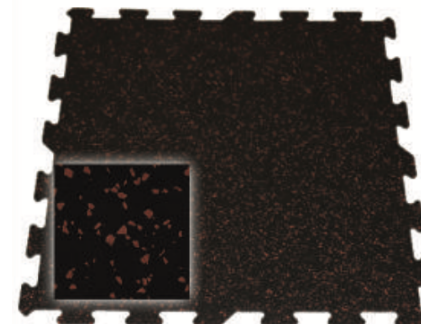

1705 RED